

Part No./型号: ST-5050xxWE70-6V640

产品承认书 SPECIFICATION FOR APPROVAL			
客户名称			
Customer			
送样规格		ST-5050xxWE70-6V640	
Specification			
送样日期			
Deliver Date			
基本参数		参见规格书	
Basic parameters			
特殊要求			
Special Requirements			
拟制	审核	批准	客户承认盖章
Issued	Checked	Approved	Customer Approved Signatures
客户使用条件及意见 Customer customer conditions and comments:			

您的宝贵意见是我们进步的源泉！ Your advices are our source of progress !



ATTENTION
 OBSERVE PRECAUTIONS
 FOR HANDLING
 ELECTROSTATIC
 DISCHARGE
 SENSITIVE
 DEVICES


1、Features/特征:

- Emitting Color/发光颜色: White/白色
- Lens Type/封装特性: Yellow Diffused/黄色散射
- Device Outline/外形特征: 5.0×5.0×0.7 (unit:mm)
- HBM ESD:2000V/人体抗静电指标: 2000V
- Pb-Free/无铅
- RoHS compliant/符合 RoHS 标准

2、Applications/应用:

- Mobile Phone backlight/手机背光源
- Display backlight/显示屏背光源
- Indoor lighting/室内照明

3、Outline Dimensions/产品外形尺寸:

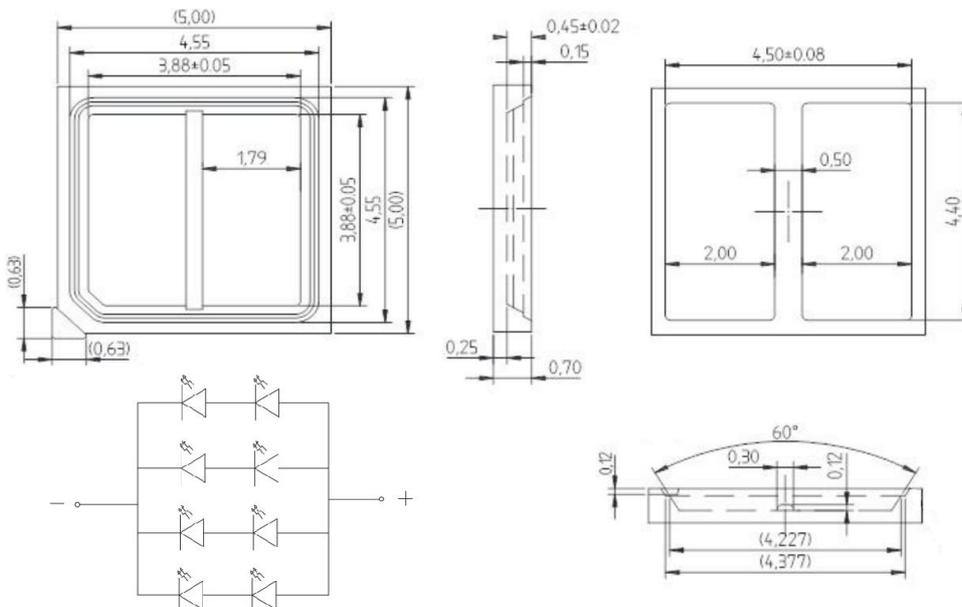

Notes(备注):

Tolerance is ±0.15mm unless otherwise noted. 非特殊标注，公差为±0.15 毫米。

Part No./型号: **ST-5050xxWE70-6V640**

4、Absolute maximum ratings/极限参数 (Ta = 25°C):

Parameter 参数	Symbol 符号	Value 参数	Unit 单位
Power Dissipation 损耗功率	Pd	5	W
Reverse Voltage 反向电压	VR	10	V
Pulse Forward Current*正向脉冲电流	IFp	1200	mA
Forward Current 正向工作电流	IFm	800	mA
Operating Temperature 工作温度范围	Topr	-40 ~ +105	°C
Storage Temperature 储存温度范围	Tstr	-40 ~ +105	°C
Junction Temperature 结温	Tj	125	°C

Notes/备注: [1]. 0.1ms pulse width, 1/10 Duty. / [1] 脉冲宽度0.1ms, 占空比1/10。

5、Electrical and optical characteristics/光电参数 (Ta = 25°C):

Parameter 参数	Symbol 符号	Test Condition 测试条件	Value 参数 ^[1]			Unit 单位
			Min.	Typ.	Max.	
Forward Voltage 正向电压	VF	IF = 640mA	5.6	—	6.4	V
Reverse Current 反向电流	IR	VR = 10V	—	—	10	μA
Color Correlated Temperature 色温	CCT	IF = 640mA	2580	—	7050	K
Luminous Flux 光通量	Φ	IF = 640mA	650	—	750	Lm
color rendering index 显色指数	Ra	IF = 640mA	70	—	—	—
Thermal Resistance ^[2] 热阻	Rthj-s	IF = 640mA	—	11	—	°C/w
Viewing Angle 发光指向角	2 θ 1/2	IF = 640mA	—	120	—	Deg.

Notes/备注: [1] Tolerance 误差: VF: ±2%, Φ: ±10%, 其它: ±5%; [2] Thermal Resistance is not measured value, the data is only for reference. / [2]热阻非实测值, 数据仅供参考。

Part No./型号: ST-5050xxWE70-6V640

6、Product Ranks/产品分档范围:

供货型号	电流	光通量(lm)
ST-505027WE70-6V640	IF=640mA	650-700
ST-505030WE70-6V640	IF=640mA	670-730
ST-505035WE70-6V640	IF=640mA	670-730
ST-505040WE70-6V640	IF=640mA	700-750
ST-505050WE70-6V640	IF=640mA	700-750
ST-505057WE70-6V640	IF=640mA	700-750
ST-505065WE70-6V640	IF=640mA	700-750

电压分档标准	
正向电压V _F 值(V)	代表符号
IF=640mA	
5.6-5.8	V21
5.8-6.0	V22
6.0-6.2	V23
6.2-6.4	V24

Notes/备注: Rank error/分档误差: VF: ±0.10V, Φ: ±15%


Part No./型号: **ST-5050xxWE70-6V640**

色坐标分档:

色坐标误差: ± 0.005

代码	轴	参数				代码	轴	参数			
N6500	X	0.3140	0.3213	0.3104	0.3037	N5700	X	0.3304	0.3377	0.3268	0.3200
	Y	0.3387	0.3349	0.3176	0.3217		Y	0.3522	0.3484	0.3311	0.3352
N5000	X	0.3468	0.3553	0.3425	0.3344	N4000	X	0.3854	0.3939	0.3787	0.3693
	Y	0.3683	0.3638	0.3422	0.3470		Y	0.3941	0.3879	0.3651	0.3717
N3500	X	0.4115	0.4206	0.4029	0.3944	N3000	X	0.4359	0.4458	0.4316	0.4219
	Y	0.4063	0.3994	0.3766	0.3844		Y	0.4161	0.4095	0.3901	0.3962
N2700	X	0.4596	0.4688	0.4561	0.4468						
	Y	0.4229	0.4170	0.3972	0.4032						

Diagram

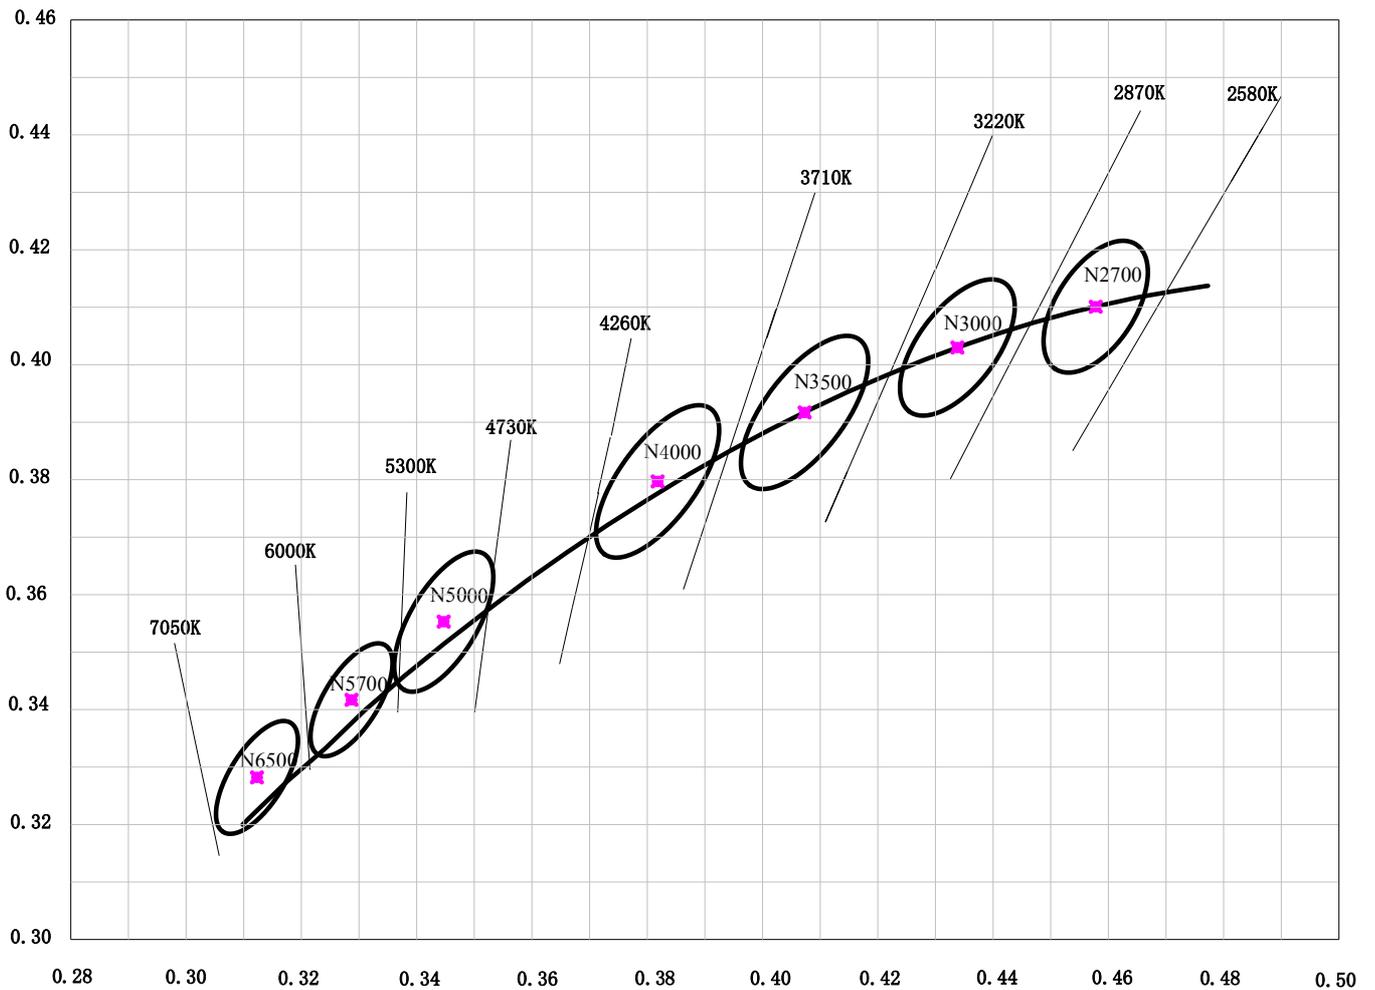

Part No./型号: **ST-5050xxWE70-6V640**

7、Typical electrical/optical characteristic curves/光电特性曲线:

Fig.1 正向电流 Vs. 正向电压

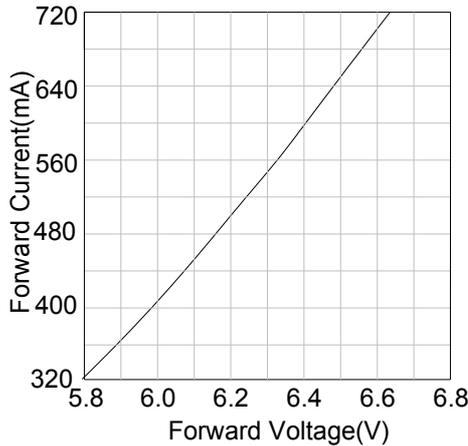


Fig.2 相对亮度 Vs. 正向电流

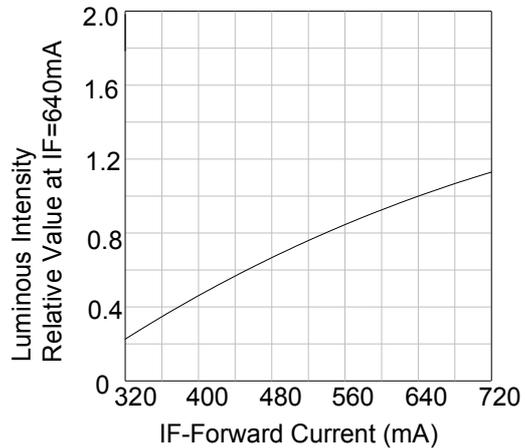


Fig.3 正向电流 Vs. 环境温度




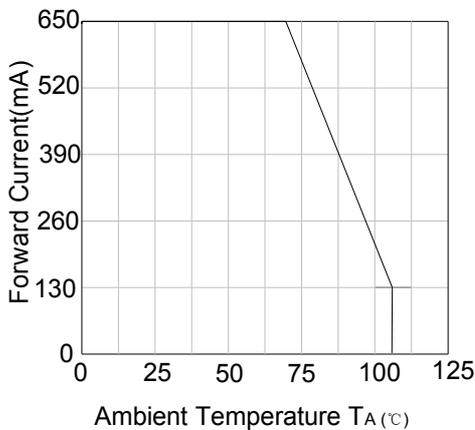


Fig.4 相对亮度 Vs. 环境温度

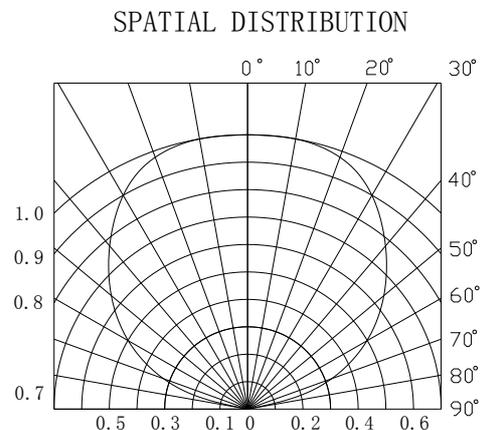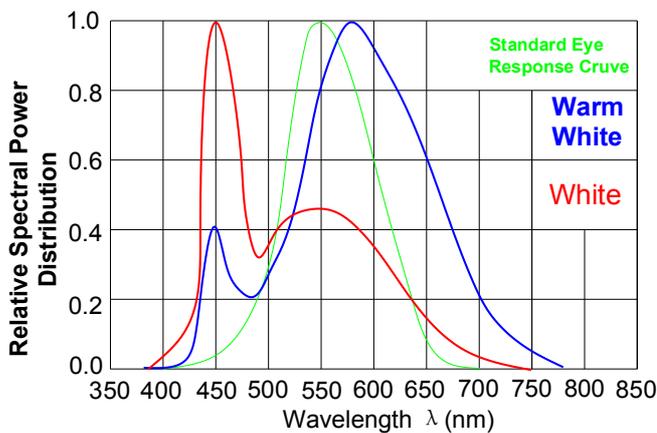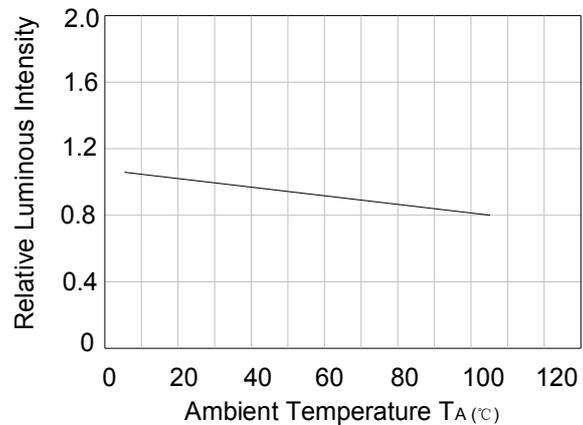

Part No./型号: ST-5050xxWE70-6V640

8、Relibility Analysis/可靠性试验

8.1 Test Items And Results/测试项目和判据

No.	Item/项目	Test Condition/测试条件	Spec. / 引用标准	Q'ty/数量	Time/时间	Standard/判定
1	IR Reflow (Reflow Soldering) 回流焊接	Tsld=260°C T=10sec	JESD22-B106	20	3times	ALL PASS
2	Solder ability 可焊性	Tsld=235±5°C, 3sec	JESD22-B102	20	1times Over 95%	ALL PASS
3	Temperature Cycle 高低温循环	100°C 30mins ↑ ↓ 5mins -40°C 30mins	JESD22-A104	20	100cycles	ALL PASS
4	High Temperature High Humidity 高温高湿	85°C/85%RH	JESD22-A118	20	168hrs	ALL PASS
5	High Temperature Storage 高温储存	Ta=105°C(-0/+10°C)	JESD22-A103	20	1000hrs	ALL PASS
6	Low Temperature Storage 低温储存	Ta=-40°C(-10°C/+0)	JESD22-A119	20	1000hrs	ALL PASS
7	Steady State perating Life 电耐久性	Ta=25°C±5°C IF=640mA	JESD22-A108	20	1000hrs	ALL PASS

8.2 Criteria For Judging Damage/判断标准

Item/项目	Symbol/符号	Test conditions /测试条件	Criteria for Judgement /判断标准	
			Min./最小值	Max./最大值
Luminous Intensity/亮度	Iv	IF=640mA	L.S.L *0.7	/
Forward Voltage/正向电压	VF	IF=640mA	/	U.S.L*1.1
Reverse current/反向电流	IR	VR=10v	/	U.S.L*2

*U.S.L.: Upper Standard Level / 上限

*L.S.L.: Lower Standard Level / 下限




Part No./型号: ST-5050xxWE70-6V640

9、Specification of Packing /包装规格

9.1 Taping and Orientation/编带和方向

Quantity/数量 : 2000 units/reel


Diameter/直径 : 178 mm

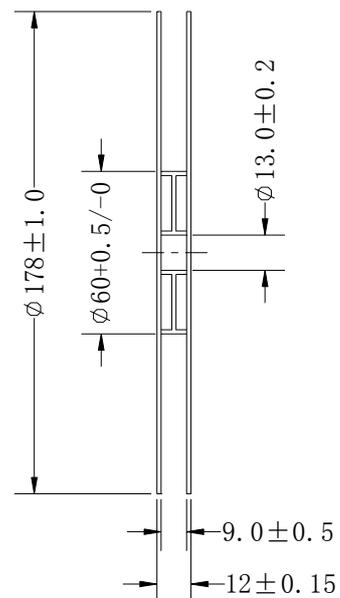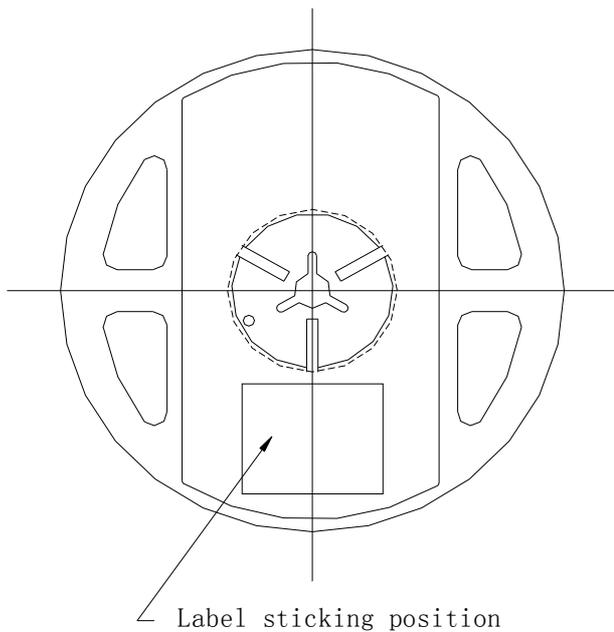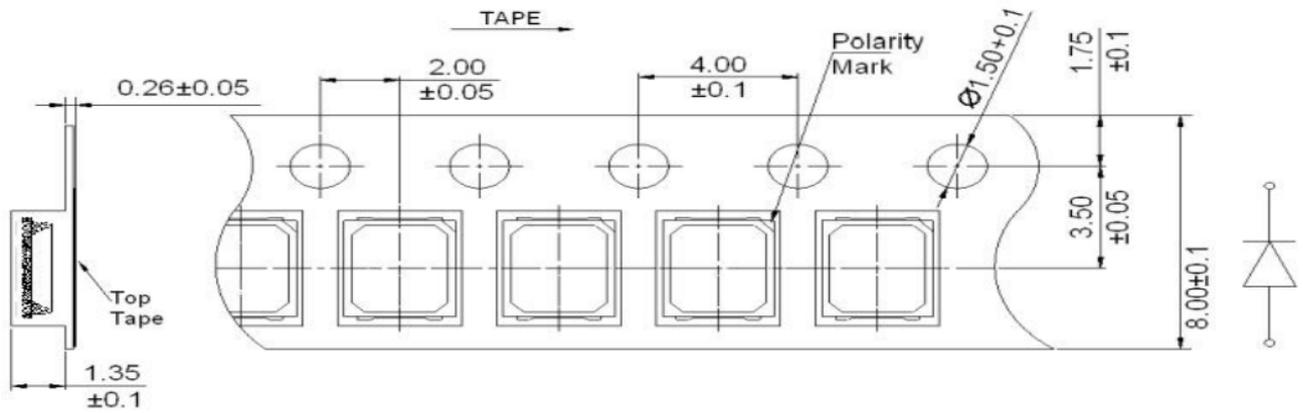


Part No./型号: ST-5050xxWE70-6V640

9.2 Specification of Packing/包装规格


Diameter/直径 : 178 mm
Width/宽度 : 12 mm
=>2000 pcs / Reel



(Anti-Static Shielding/抗静电保护袋)
Thickness/厚度: T=0.1 mm
=> 1 Reel / Bag

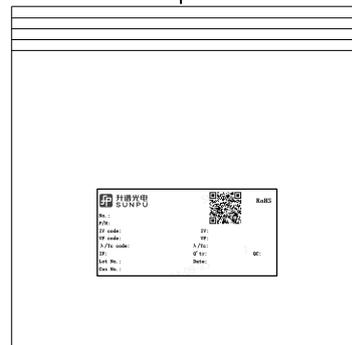

5 Bags / Box
=> 10 ,000 pcs / Box

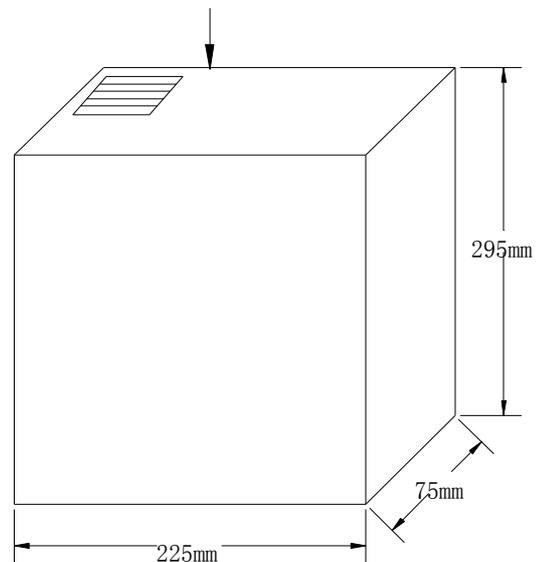

Part No./型号: ST-5050xxWE70-6V640

9.3 Label Form Specification/标签格式规范



No: Product number 产品品号	IV: Luminous flux/luminous intensity 光通量/发光强度
P/N: Product name 产品品名	VF: Voltage 电压
IV code: Luminous flux/luminous intensity code 光通量/发光强度代码	λ/Tc: Wavelength/color shift 波长/色系档位
VF code: Voltage Code 电压代码	Q'ty: Quantity of packing 包装数量
λ/Tc code: Wavelength code/color temperature 波长代码/色温	Date: Label print date 标签打印日期
IF: Test current 测试电流	QC: Inspection Seal 检验合格章
Lot No: Production lot number 生产批号	
Cus No: Customer data 客户料号	

10、Notes/注意

10.1 Moisture Proof Packaging/防潮包装

10.1.1 LEDs need to package in moisture proof bag. When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture proof bag is used to keep moisture to a minimum in the bag.

产品必须包封装在防潮包装袋中。当湿气进入防潮包装袋的时候，在焊接时，湿气会受热汽化膨胀，从而可能影响产品的光学特性，甚至造成封装胶体的开裂剥离。因此，防潮袋要求放置在保持低湿度的盒中。

10.1.2 Moisture proof function is inactive. The moisture proof bag is made of an aluminum moisture proof bag. A package of a moisture absorbent material (silica gel) is inserted into the aluminum moisture proof bag. The silica gel turns the smashing from the transparent circular spherical pellet.

防潮的作用是缓慢的。防潮袋使用铝防潮袋，并在铝防潮袋中放入潮气吸收材料（硅胶干燥剂）。当硅胶干燥剂吸收潮气后，硅胶干燥剂从透明圆形球状颗粒变成粉碎物。

Part No./型号: ST-5050xxWE70-6V640


10.2 Storage Method/储存方式

10.2.1 Before opening the bag: The LEDs should be used within a year and kept at 30°C or less and 60%RH or less. The moisture proof bag with absorbent material is needed when storing the LEDs.


拆开包装袋之前：产品可以储存一年，但要求放置在温度低于30℃,湿度低于60%的环境中；当存放产品时，必须放置在带有干燥剂的防潮容器中。

10.2.2 After opening the bag: The LEDs should be soldered within 24 hours after opening the package. If unused LEDs remain, they should be stored in moisture proof bags with moisture absorbent material. It recommended that the user use the LEDs as soon as possible. If the LEDs have exceeded the storage time or the moisture absorbent material has faded away. Baking process should be performed by using more than 24hours baking at 60±5°C before using LEDs.

拆开包装袋之后：产品应该在拆封后的24小时内焊接完毕；如果没用完，产品应该储存在带有干燥剂的防潮包装袋中；建议客户尽快的使用完产品；如果产品超出了使用期限或者干燥剂失效，那么产品在使用前必须在60±5℃中烘烤至少24小时。

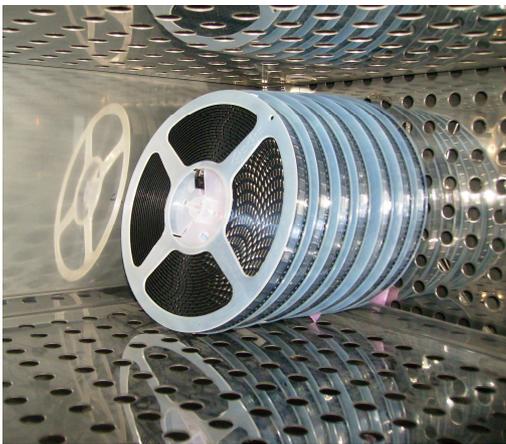

√正确

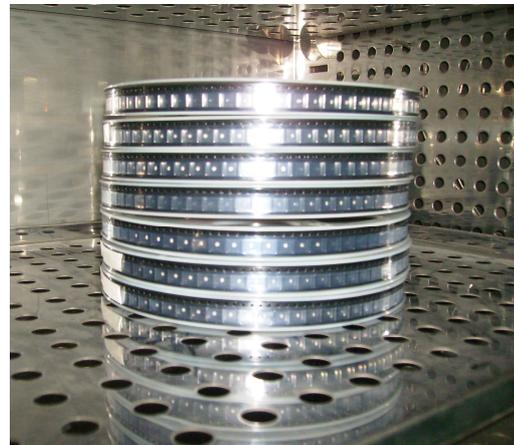

X错误

10.3 Heat Generation/产品热量的产生


Thermal design of the end applications are of paramount importance. Please consider the heat generation of the LED when making the system design. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.

应用产品的热学设计是至关重要的。在做系统设计时，请考虑LED的散热，避免热量的积累，必须严格的在允许的温度范围内使用。

Part No./型号: ST-5050xxWE70-6V640

10.4 Soldering/焊接

10.4.1 Lead Solder/回流焊接

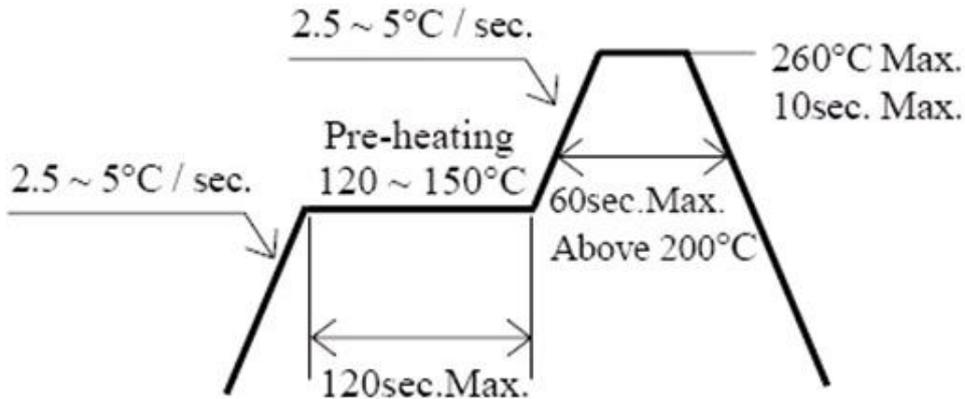

10.4.2 Notes for reflow soldering/回流焊注意事项:

1. Baking process should be performed by using more than 24hours baking at 60±5°C before using LEDs./ 在使用前LED必须在60±5°C中烘烤至少24小时。
2. Please choose the right nozzle to avoid the damage to products due to the pressure./ 选择合适的吸嘴大小和压力，以避免对产品产生不良隐患。
3. In order to ensure the reliability of LED, please complete one welding, not more than one reflow soldering./ 为确保LED的可靠性，请一次焊接完成，不可过多次回流焊。

10.4.3 Hand Soldering (Not Recommended) /手工焊接 (不推荐)

Soldering iron/烙铁焊接: 260 degrees C max/不超过260°C; 3 seconds max/不超过3s; once/允许1次.

10.5 Cleaning/清洗

It is recommended that isopropyl alcohol be used as a solvent for cleaning the LEDs. It should be confirmed beforehand whether the solvents will dissolve the package the resin or not when using other solvents. Before cleaning, a pre-test should be done to confirm whether any damage to the LEDs will occur. Please do not clean the LEDs by the ultrasonic.

建议使用酒精作为溶剂清洗LED。若要使用其他溶剂，应该预先证实是否能溶化封装

Part No./型号: ST-5050xxWE70-6V640

料。在清洗作业前，必须预先实验确认对LEDS无任何的伤害。请不要使用超声波清洗LED。

10.6 Static Electricity/静电

It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs. All devices, equipment and machinery must be properly grounded. It is recommended that precautions be taken against surge voltage to the equipment that mounts the LEDs.

在接触LED时，建议使用防静电手腕带或防静电手套。所有的器件、设备和机器必须有可靠的接地。对所有LED接触的设备，建议采取预防措施消除冲击电压。

10.7 Others/其他

1. The LED light output is strong enough to injure human eyes. Precautions must be taken to prevent looking directly at the LEDs with unaided eyes for more than a few seconds.

LED的光辐射足够强时，会对人眼造成伤害。若眼睛要直接看LED，并且要一定的时间，则必须采取相应防护措施。

2. LED operating environment and sulfur element composition cannot be over 100PPM in the LED mating usage material.

LED工作环境及与LED适配的材料中硫元素及化合物成份不可超过100PPM。

3. Not suitable to operate in acidic environment, PH<7

LED不可用在PH<7的酸性环境。

4. When we need to use external glue for LED application products, please make sure that the external glue matches the LED packaging glue. Additionally, as most of LED packaging glue is silica gel, and it has strong Oxygen permeability as well as strong moisture permeability; in order to prevent external material from getting into the inside of LED, which may cause the malfunction of LED, the single content of Bromine element is required to be less than 900PPM, the single content of Chlorine element is required to be less than 900PPM, the total content of Bromine element and Chlorine element in the external glue of the application products is required to be less than 1500PPM.

在使用外封胶涂抹LED产品时，应确保外封胶与LED封装胶水相匹配，因为大多数LED的封装胶水为硅胶，它有较强的氧化性和较强的吸湿性，必须防止外封材质进入LED内部以造成LED的损伤，单一的溴元素含量要求小于900PPM，单一氯元素含量要求小于

Part No./型号:ST-5050xxWE70-6V640

900PPM，在涂抹LED产品时要求外封胶溴元素与氯元素总含量必须小于1500PPM。

5. To ensure the quality of our LEDs, So please do not put pressure on the LEDs.

为确保LED的可靠性，在操作过程中不可施加压力在LED器件胶体表面。



✓ 正确



✗ 错误